




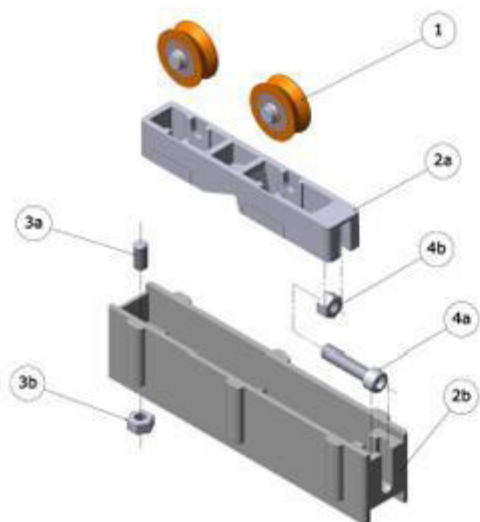


DAYTONA

- 1- Rol. / Rod.
- 2a- PA66
- 2b- PA66
- 3a- M5
- 3b- M5
- 4a- M5
- 4b- M5

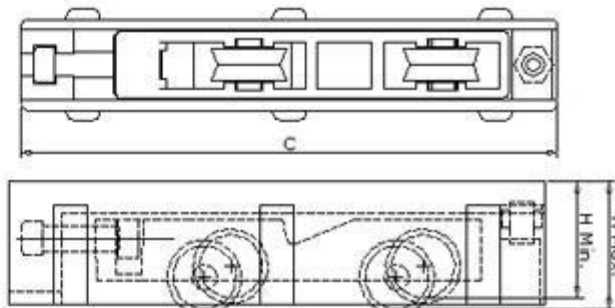

Ref./Code				Série / Serie / Série / System COR4200; CT ANICOLOR	
	Qty	Kg	Gr	Especificações / Especificaciones Caracteristiques / Specifications	
		Ensaio Prueba Test			
9190.3DT90D	50	90	01481	3400	PAT.PEND.Rol. ECO eixo Inox / Ferragens Inox PAT.PEND.Roulement ECO axe Inox / matériel Inox PAT.PEND.Rod. ECO eje Inox / Herrajes Inox PAT.PEND.ECO roller with Stainless steel HW and axle



H máx.
30,5
H min.
28
Ang/Raio
15°

Nota: Para funcionar corretamente em condições mais extremas, como por exemplo a salinidade ou altos níveis de humidade, o rolamento deverá ser muito bem lubrificado com massa extra na montagem, porque a lubrificação normal é para uso regular.

Note: In order to function properly under more extreme conditions, like salinity or high levels of humidity, the roller must be very well lubricated with extra mounting grease because the standart lubrication is for regular use.